

E – SEMI-SUBMERSIBLE PUMP.



CONVEYING CAPACITY
30 L/H–300 M³/H
(0.132–1,320
USGPM)


PRESSURE
UP TO 12 BAR
(180 PSI)

SEPEX semi-submersible pumps drain full containers, pits, basins and barrels. They can convey abrasive or corrosive products with thin to high viscosity. Custom-built for the application, they are easy to maintain and have low operating costs. Overall, our semi-submersible pumps are a cost-effective alternative to other pump systems.


PROPERTIES AND BENEFITS

- BE range available in four different immersion variations for individual adaption to the application
- Minimal pulsation, uniform flow
- Variable submersible depths
- Increases the available NPSH value (Net Positive Suction Head)
- The pump can be installed in a “can” to further increase the NPSHA
- Can be installed in a closed system (complies with environmental regulations)

BE RANGE
SEMI-SUBMERSIBLE
VARIANT U

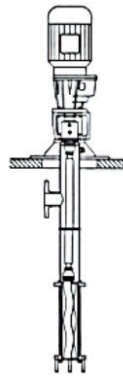

BE RANGE
SEMI-SUBMERSIBLE
VARIANT O

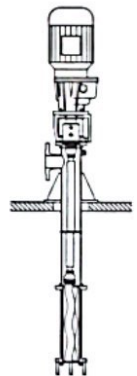

BE RANGE
SEMI-SUBMERSIBLE
VARIANT K



BE RANGE
SEMI-SUBMERSIBLE
VARIANT W

